

twin screw tugboat:



Specifications

Length o.a.	: 28,50 m
Breadth	: 8,80 m
Depth	: 4,25 m
Draught	: 3,25 m
Service speed	: 12 knots
Bollard Pull	: 32 tons

Propulsion


Main engine	: 2x GM Detroit Diesel 149 TI
Capacity	: 955 kW per piece

Auxiliary equipment


Main generator	: Detroit Diesel 8V92TA, 325 kW Detroit Diesel 4-71N, 81 kW
Fire fighting	: 600m ³ /h @ 13 bar

Miscellaneous


Operating conditions	: -30°C - +40°C 90% RH
Berths	: 14 persons
Owner	: Nigerian Port PLC
Class notation	: LRS +100 A1, Seagoing / harbor Tug, + LMC

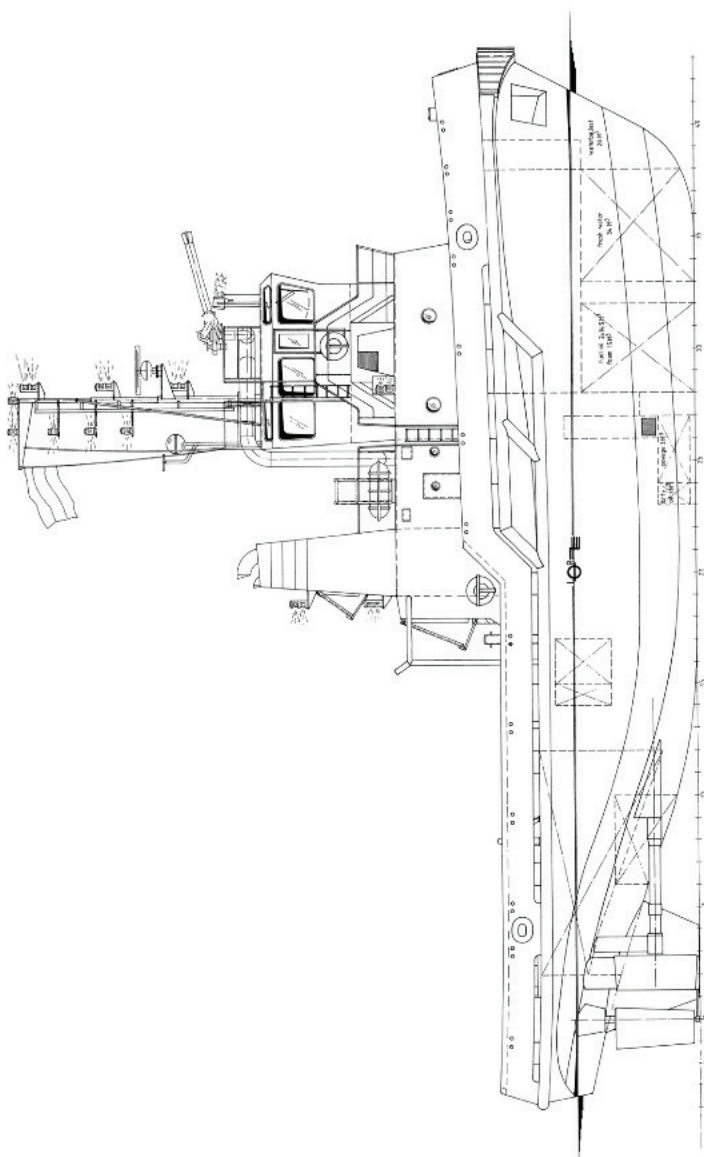


TOP DECK




NAV BRIDGE DECK




LOWER BRIDGE DECK

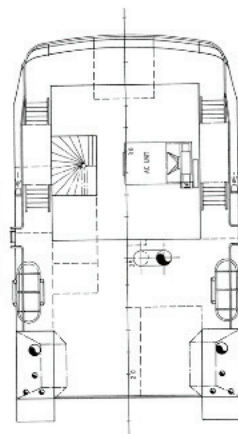

MAIN DECK

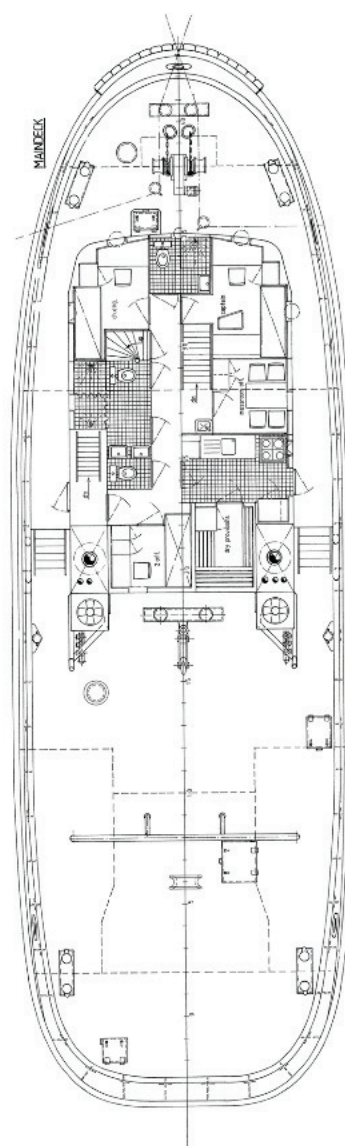

TWEEN DECK

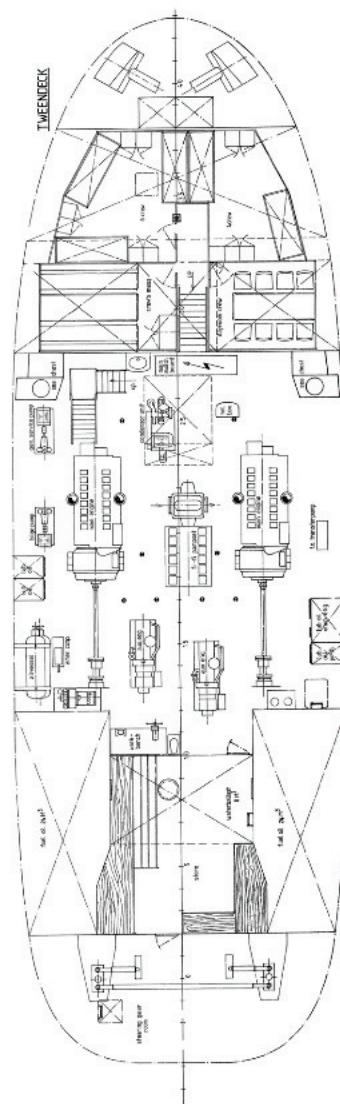

PRINCIPAL DIMENSIONS
 LENGTH O.A. 28.50M
 LENGTH B.P. 24.80M
 BREADTH MLD. 8.80M
 DEPTH MLD. 4.25M
 DRAFT 3.25M
 CLASS * 100A.1 TUG * UVC